

RRX

RRX

Range



ISO colour code

Flat fan nozzle with air injection :

- ▶ Drift reduction.
- ▶ For all applications requiring an important drift reduction.
- ▶ Application : advised with systemic chemicals.
- ▶ Kwix cap : ¼ quick fit.
- ▶ - Flow calibration insert : ceramic.
- ▶ - Spraying insert : resin.

nozai

A broad field of applications

Kwix cap : ¼ quick fit


Ceramic flow calibration insert

Air suction orifice

Venturi : air suction zone

Mixing chamber

Resin spraying insert

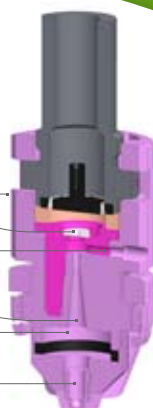

350 to 710 μ



	Bar	ℓ / min	Flow ℓ / ha according to the forward speed and with 0,50 m nozzle spacing							
			5 km/h	6 km/h	7 km/h	8 km/h	9 km/h	10 km/h	11 km/h	12 km/h
RRX 015 green	4,0	0,68	163	136	117	102	91	82	74	68
	5,0	0,75	180	150	129	113	100	90	82	75
	6,0	0,84	202	168	144	126	112	101	92	84
	7,0	0,92	221	184	158	138	123	110	100	92

RRX 02 yellow	4,0	0,91	218	182	156	137	121	109	99	91
	5,0	1,01	242	202	173	152	135	121	110	101
	6,0	1,11	266	222	190	167	148	133	121	111
	7,0	1,22	293	244	209	183	163	146	133	122

RRX 03 blue	4,0	1,37	329	274	235	206	183	164	149	137
	5,0	1,53	367	306	262	230	204	184	167	153
	6,0	1,64	394	328	281	246	219	197	179	164
	7,0	1,83	439	366	314	275	244	220	200	183

Your local dealer

nozal

A broad field of applications

rue de l'Industrie - 51200 EPERNAY - FRANCE

www.nozal.fr